



LINA ETANJ V.3

Surface Mounted 56W Etanj LED Luminaire

Order Code : 3107644
 Product Code : LNE 055U 40OD00 7K2 149 ST V.3



Product Data

Standard Features

Housing	: Aluminium extrusion housing
Diffuser	: Glare controlled opal diffuser
IP Grade	: IP 64
Installation	: Surface mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 56.1W
Final Luminous Flux	: 7276.6 lm
Efficacy	: 129.6 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1kV
Drive Current	: 350mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK 09
Led Life Time - L70	: 60.000 hours @Ta= 40 °C

Photometric Curve

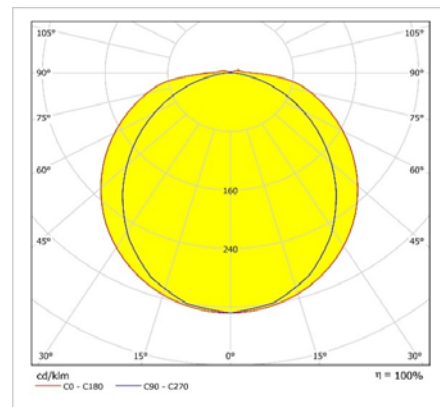


Optional Features

Correlated Color Temperatures	: 3000K, 5700K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Sensor	: Yes

LINA ETANJ V.3

Surface Mounted 56W Etanj LED Luminaire

3107644 LNE 055U 40OD00 7K2 149 ST V.3

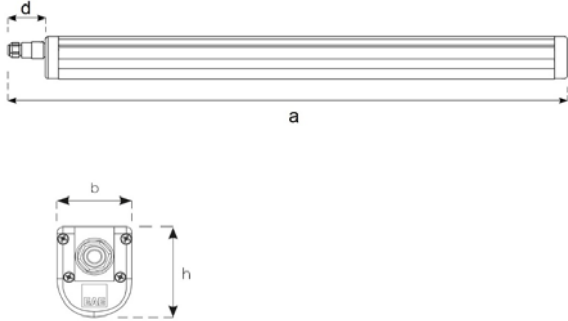


Dimension (mm)

	a	b	h	d
Standard	1560	65	83	70
With Emergency Kit (1 hr.)	1560	65	83	70
With Emergency Kit (3 hrs.)	1560	65	83	70
With Sensor	1665	65	83	70

Weight (kg)


Standard	2,7
With Emergency Kit (1 hr.)	3,1
With Emergency Kit (3 hrs.)	3,6
With Sensor	3

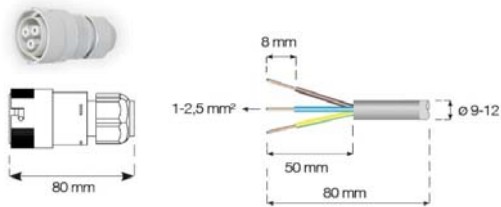

Suspension Set



Stainless steel
suspension set



Top View

- EAE, reserves the right to make changes without prior notice.



Revision date: 15.06.2017