



PROLIT COMPACT

105W Front and Area LED Lighting Luminaires

Order Code : 3114159
 Product Code : PRL 100Z 57CM00 60 LLL



Product Data

Standard Features

Housing	: Aluminium injection, Electrostatic powder painted housing
Diffuser	: Tempered Glass
Optic	: 60° reflector
IP Grade	: IP 66
Installation	: Floor Mounted
Light Source	: Power LED


Optical & Electrical Features

Power Consumption	: 105W
Final Luminous Flux	: 9449.9 lm
Efficacy	: 89.9 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Drive Current	: 700mA
Correlated Color Temperature	: 5700K
Color Rendering Index	: >65

Other Features & Conditions

Operating Temperature Range	: -20 °C/+50 °C
Impact Resistance	: 1k 10
Led Life Time - L70	: 50.000 hours @Ta= 50 °C

Photometric Curve

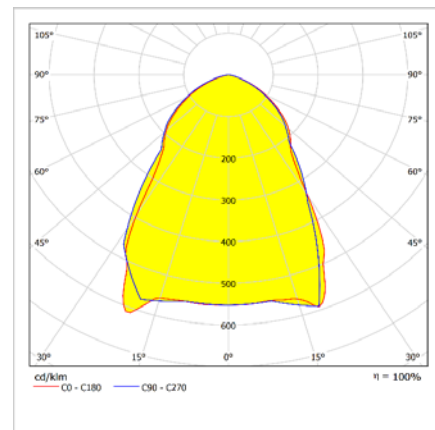


Optional Features

Angle Options : 18°, 28°, Wide angle, Narrow angle, Asymmetric angle

PROLIT COMPACT

105W Front and Area LED Lighting Luminaires

3114159 PRL 100Z 57CM00 60 LLL

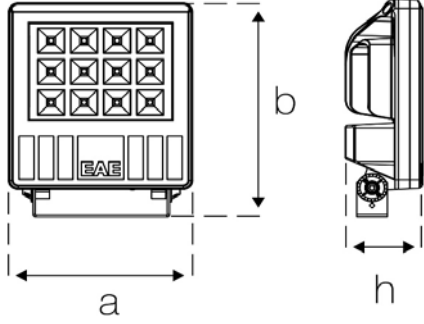

Dimensions (mm)


	a	b	h
Standard	246	305	96



Weight (kg)

Standard	4,9
----------	-----

Angle Options

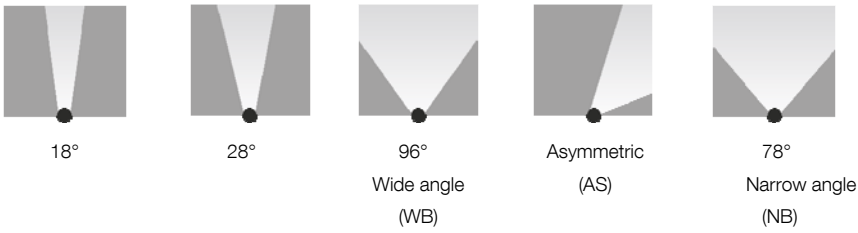

- EAE, reserves the right to make changes without prior notice.



Revision date: 20.05.2017