



REVOLED-S v.2 LOWBAY

Surface Mounted 40 W LED High Bay Luminaire



Order Code : 3096946
Product Code : RVL 040U 40TF00 LB 5K30 V.2

Product Data

Standard Features

Housing	: Aluminium profile housing
Diffuser	: Tempered glass with security film
Optic	: Miro silver reflector, wide angle
IP Grade	: IP65
Installation	: Surface mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 39.5 W
Final Luminous Flux	: 5378.6 lm
Efficacy	: 135.9 lm/W
Input Voltage	: 220-240 V
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 4 kV
Drive Current	: 285 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+45 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+30 °C
Impact Resistance	: IK 10
Led Life Time - L70	: 60.000 hours @Ta= 45 °C

Photometric Curve

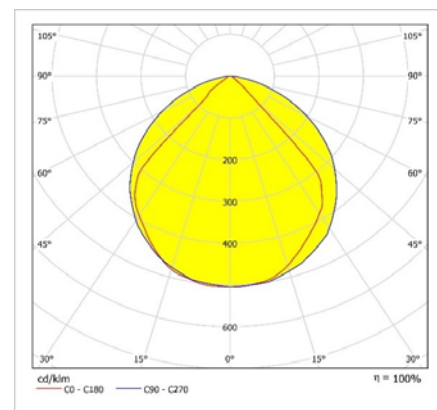


Optional Features

Correlated Color Temperatures	: 3000K, 5700K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes

REVOLED-S v.2 LOWBAY

Surface Mounted 40 W LED High Bay Luminaire

3096946 RVL 040U 40TF00 LB 5K30 V.2

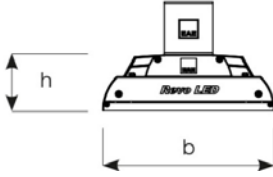

Dimension (mm)


	a	b	h
Standard	416	223	75
With Emergency Kit (1, 3 hrs.)	688	223	75
DALI	480	223	75

Weight (gr)

Standard	3,7
With Emergency Kit (1, 3 hrs.)	4,4 - 4,6




Suspension Set




Busbar Mounting Set
Product Code : 3080654

a	b	c	Weight (gr)
62mm	48mm	162mm	312

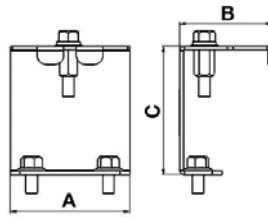

Cable Tray and Wall Mounting Set
Product Code : 3080655

a	b	c	Weight (gr)
62mm	48mm	70mm	191



Wall-Mounted Suspension Set
With 10° Angular Adjustment Steps
Product Code : 3080656

a	b	c	Weight (gr)
110mm	89mm	290mm	-

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90

www.eaeaydinlatma.com.tr

Revizyon tarihi: 17.10.2017